



KOTL JinLong Machinery


[Home](#) | [Product Info](#) | [About us](#) | [Factory tour](#) | [ISO Certifications](#) | [RoHS Info](#)
[Sample Request](#) | [Contact us](#) | [Email us](#)

Part No. Z4SL2A0000001

Notes:

1. Rated voltage: 1.3V DC
2. No load current: 50 mA Max
3. No load speed: 21000±2500rpm
4. Starting current: 125 mA Max
5. Terminal resistance: 13Ω (±20%)
6. Starting voltage: 1.0V Max
7. Shaft end play: 0.05~0.2mm
8. Specs of lead wires: AWG32 UL1571
9. Unmarked tolerance: ± 0.1mm
10. Do not move the plastic rings on the shaft.
11. Pressing in direction A is not permitted.

NOTE: Motor shown has a shaft length of 3.8 mm. We can also supply this motor with a shaft length of 4.7 mm or 5.1mm. Other shaft length are possible but require a tooling charge.

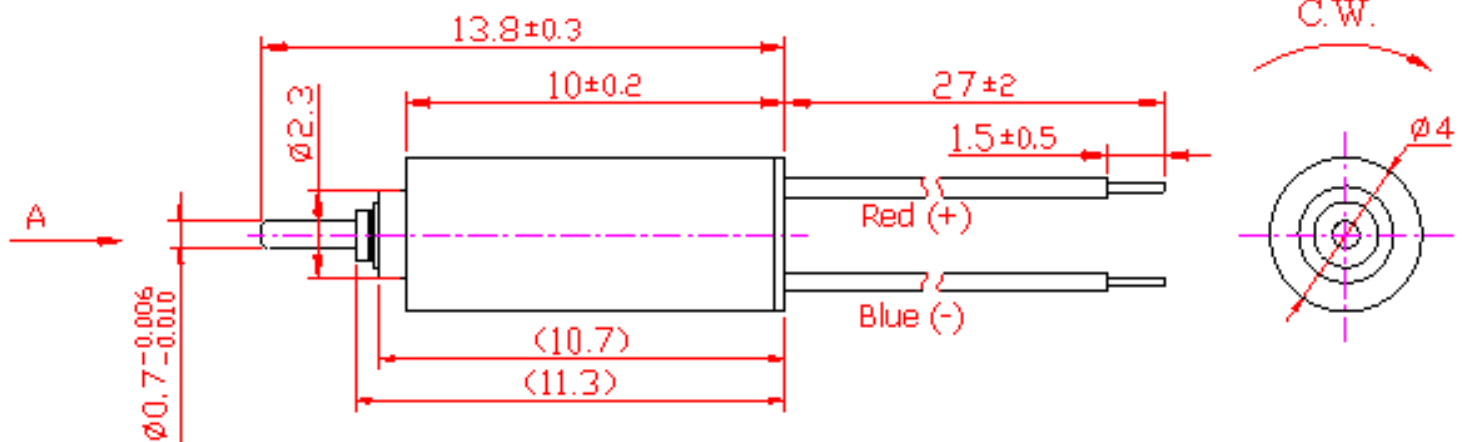

[Home](#) | [Product Info](#) | [About us](#) | [Factory tour](#) | [ISO Certifications](#) | [RoHS Info](#) | [Sample Request](#) | [Contact us](#) | [Email us](#)

Copyright 2009 © VibratorMotor.com